



KR11 Plus Series

Online UPS 1~10kVA

- »Low THDi: <5%
- »Output PF up to 1.0
- »AC/AC efficiency up to 95%
- »High power density design

Green Power:

- Input power factor up to 0.996, Low THDi (< 5%), decrease the pollution to city power
- AC/AC efficiency up to 95%, energy saving and low carbon emission
- Compliance with RoHS standard, innocuous and environmental friendly
- Design in accordance to International EMC and Safety standard


Outstanding Profitability:

- Minimum 0.05m² footprint, more units for your container delivery and installation
- Get at least 10% more output power for your loads
- Up to 95% efficiency

Excellent Flexibility:

- Output voltage and ECO mode are selectable via LCD
- 1~8A charging current settable via software
- Batteries total quantity settable (16/17/18/19/20 for 6-10kVA)
- Maintenance bypass for 6-10KVA (option)
- Battery disconnection alarm (option)
- SNMP or RS485+dry contact (option)
- Charging voltage temperature compensation (option)

Typical Applications:

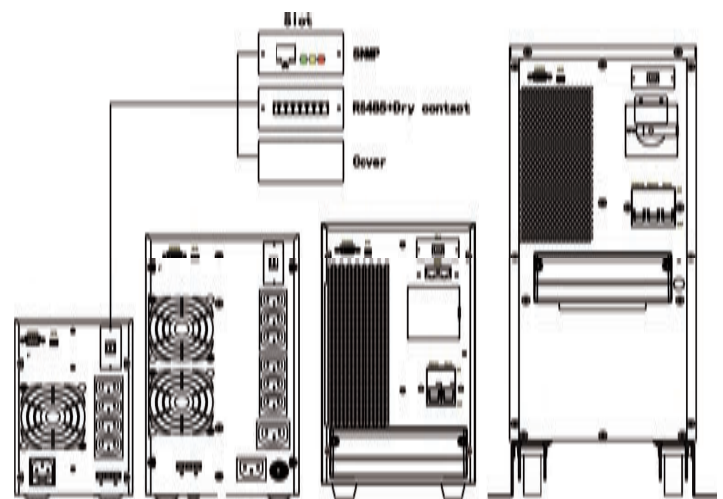

Available Socket:



Ecological Power Network

Technical Specification:

MODEL	KR1000+/ KR1000L+	KR2000+/ KR2000L+	KR3000+/ KR3000L+	KR6000+/ KR6000L+	KR1110S+/ KR1110+
INPUT					
Voltage (Vac)	120~295			80~275	
Frequency (Hz)	50/60± 10% (50/60Hz auto-sensing)				
Power Factor	≥0.99				
THDi	<5%				
OUTPUT					
Capacity (VA)	1000	2000	3000	6000	10000
AC/AC Efficiency (Max.)	92%	93%	94%	95%	95%
Power Factor	0.9 (1.0 optional)				
Voltage (Vac)	208/220/230/240±1% (selectable on display panel)				
Frequency (Hz)	50/60±0.2% (battery mode)				
THDv	THD < 2% (linear load); THD < 5% (nonlinear load)			THD < 1% (linear load); THD < 4% (nonlinear load)	
Transfer Time	0				
BATTERY					
Voltage (Vdc)	24/36	48/72	72/96	192	192
BATT Type	2×9Ah 12V or 3×7Ah 12V	4×9Ah 12V or 6×7Ah 12V	6×9Ah 12V or 8×7Ah 12V	16×7Ah 12V	16×9Ah 12V
Voltage (Long backup)(Vdc)	36	72	96	192~240	192~240
BATT Type (Long backup)	External			External (16~20 units settable)	
Charger Current (A) Max.	1 (Standard)/4 (Long backup)			1~8 (adjustable)	
OTHER					
Communication Interface	RS232, EPO, USB (slot) (SNMP, RS485+dry contact are optional in slot)				
LCD Display	AC input & output voltage, frequency, Load level, Battery level, Temperature; AC mode, Battery mode, Bypass mode, and Fault				
Alarm	Low battery, abnormal AC input, UPS failure, etc.				
Protection	Low battery, overload, short-circuit and over temperature, etc.				
Noise (dB)	<50	<55			
Working Temperature (°C)	-5 ~ 40				
Relative Humidity	0 ~ 95%, No condensation				
Dimension (W×D×H) mm	145×360×225	190×400×330		230×502×553/190×422×337	
Weight (Standard)(kg)	9.2 or 11.6	17.7 or 22.4	22.9 or 27.6	54.5	56.2
Weight (Long backup)(kg)	4.5	8.5	9.2	10.9	12.5

- Specification is subject to change without prior notice.
- Information is provided for reference purpose only and constitutes neither an offer or an acceptance.

Kehua Hengsheng Co., Ltd.

Add: No. 457, Malong Road, Torch High-Tech Industrial Zone, Xiamen, Fujian, China 361006

Tel: +86-592-5160516 Email: intertrade@kehua.com www.kehua.com

